

PF92511

Cast Iron Submersible Sump Pump with Side Discharge



Product Features


- 1/2 HP cast iron submersible sump pump with side discharge - vertical float
- Submersible sump pump for typical residential and commercial applications
- Comes with 10' power cord
- 7.6 amps, 912 watts
- Maximum head of 25 feet
- Maximum flow rate of 70 GPM
- Permanent split capacitor motor
- SJE Rhombus vertical float switch
- Liquid temperature range 32°-120°F
- Discharge size 1-1/2" FNPT
- Handles 1/2" solids
- Cast iron housing and base
- Glass reinforced nylon impeller



PF92511

Product Specifications

Performance Curve

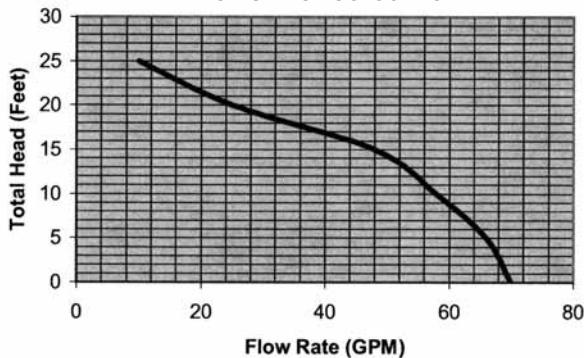

Performance Chart

Discharge Height	0'	5'	10'	15'	20'	25'
Gallons per Minute	70	66	58	48	25	10
Gallons per Hour	4200	3960	3480	2880	1500	600

Warranty and Codes

These products come complete with installation, operating care and maintenance instructions. All PROFLO pumps carry a 1-year limited warranty. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed products to fill any order unless we agree in writing to do otherwise.

- Cast iron & utility pumps – 3-year limited warranty
- Thermoplastic sump & utility pumps – 1-year limited warranty
- Sewage & effluent pumps – 1-year limited warranty

For service call 888-6-PROFLO

